

Existing Conditions Map



**What issues + opportunities do you see?
Use the post-its to post your comments
on the map.**



Existing Conditions Photos



What issues + opportunities do you see?
Use the post-its to post your comments below.

Blank area for post-it comments.



Inventory of Quality Trees

Tagged trees on site that were determined to be of good condition

NUMBER	SPECIES	SIZES	REMOVE
1	Cottonwood	12"	
2	Cottonwood	12"	
3	Hickory	24"	
4	Cottonwood	48"	
5	Maple	5"	
6	Maple	4"	
7	Black Cherry	12"	
8	American Elm	18"	X
9	Black Locust	12"	X
10	Tulip Tree	6"	X
11	Elm	24"	X
12	Hickory	5"	X
13	Elm	6"	X
14	Elm	6"	X
15	Elm	8"	X
16	Elm	20"	X
17	Norway Maple	12"	X
18	Hickory	5"	X
19	Hickory	4"	X
20	Maple	26"	X
21	Maple	28"	X
22	Honeylocust	36"	
23	Ginkgo	1"	
24	Elm	18"	X
25	Elm	5"	X
26	Elm	12"	X
27	Maple	12"	X
28	Cherry	4"	X
29	Maple	10"	X
30	Maple	6"	X
31	Norway Maple	8"	X
32	Maple	6"	X
33	Maple	24"	X
34	Elm	6"	X
35	Maple	24"	X
36	Elm	8"	X
37	Maple	8"	X
38	Elm	6"	X
39	Maple	8"	X
40	Honeylocust	10"	
41	Pear	12"	X

Existing trees are impacted due to excavation, grading and construction of the access ramps.

Trees will be replaced per City code requirements.

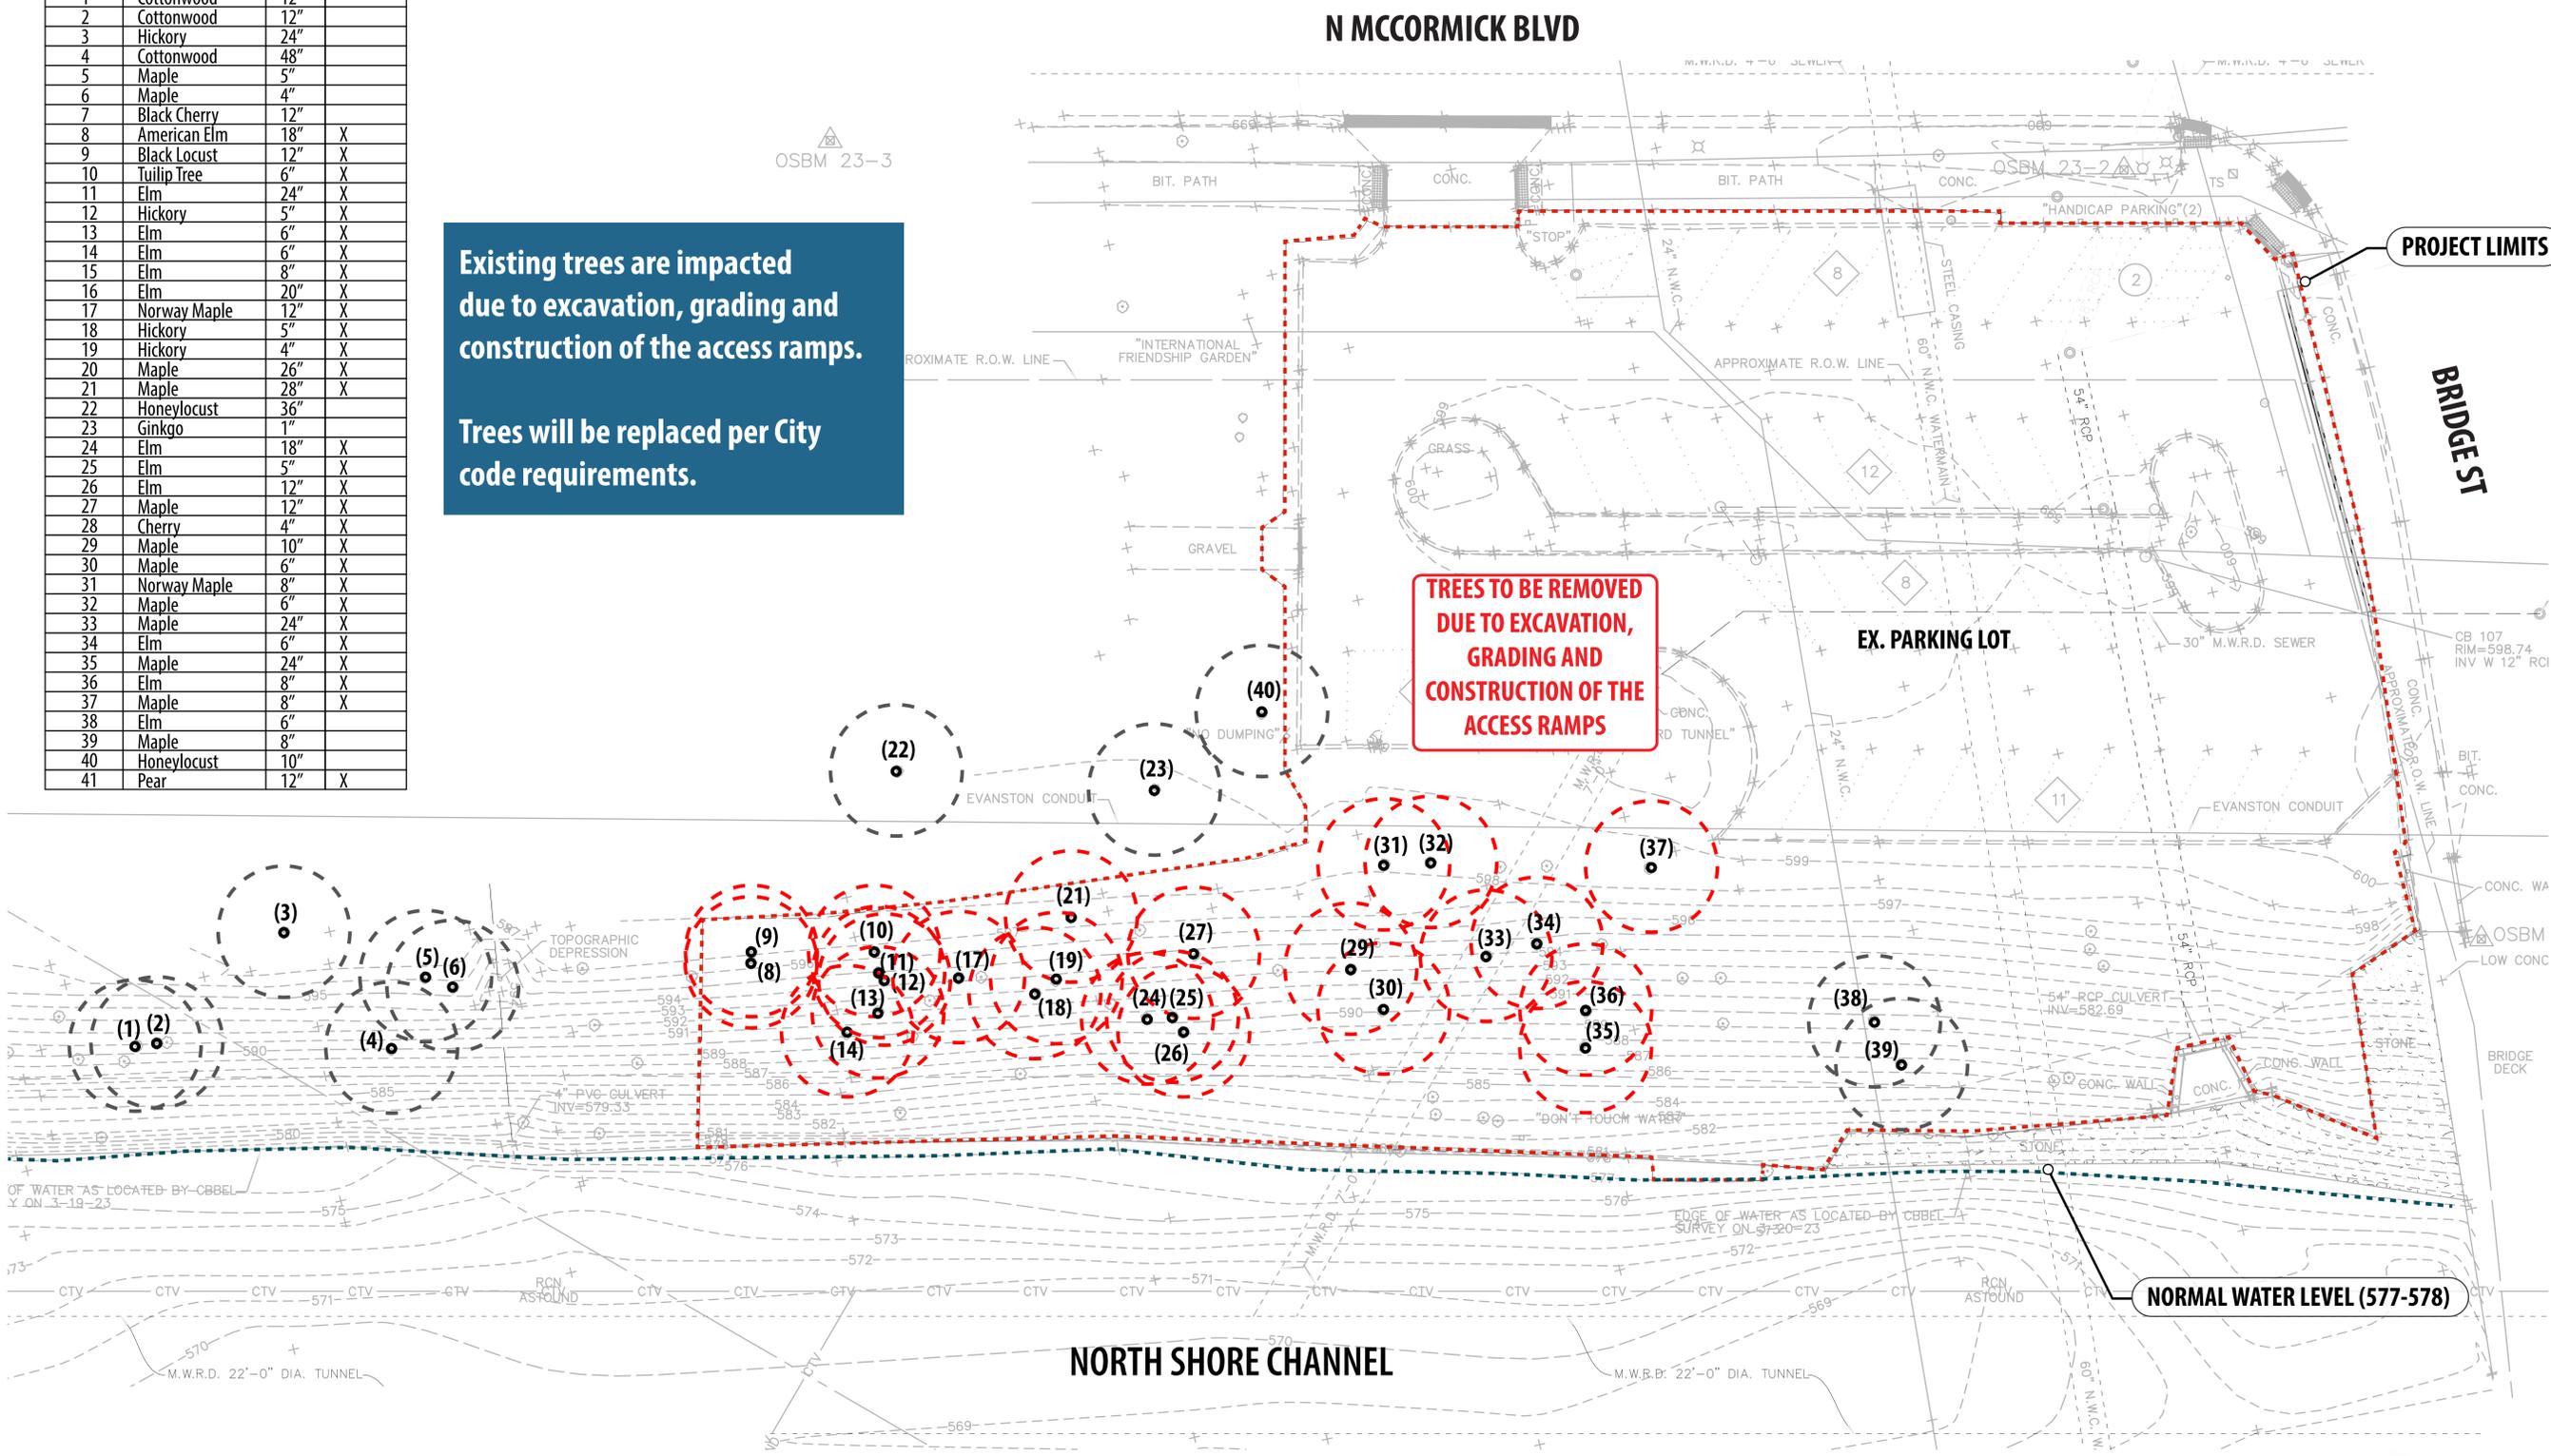


City of Evanston Canoe Launch at Ladd Arboretum

Public Meeting | Evanston Ecology Center | November 28, 2023




What comments do you have about the concept?
Use the post-its to post your comments below.

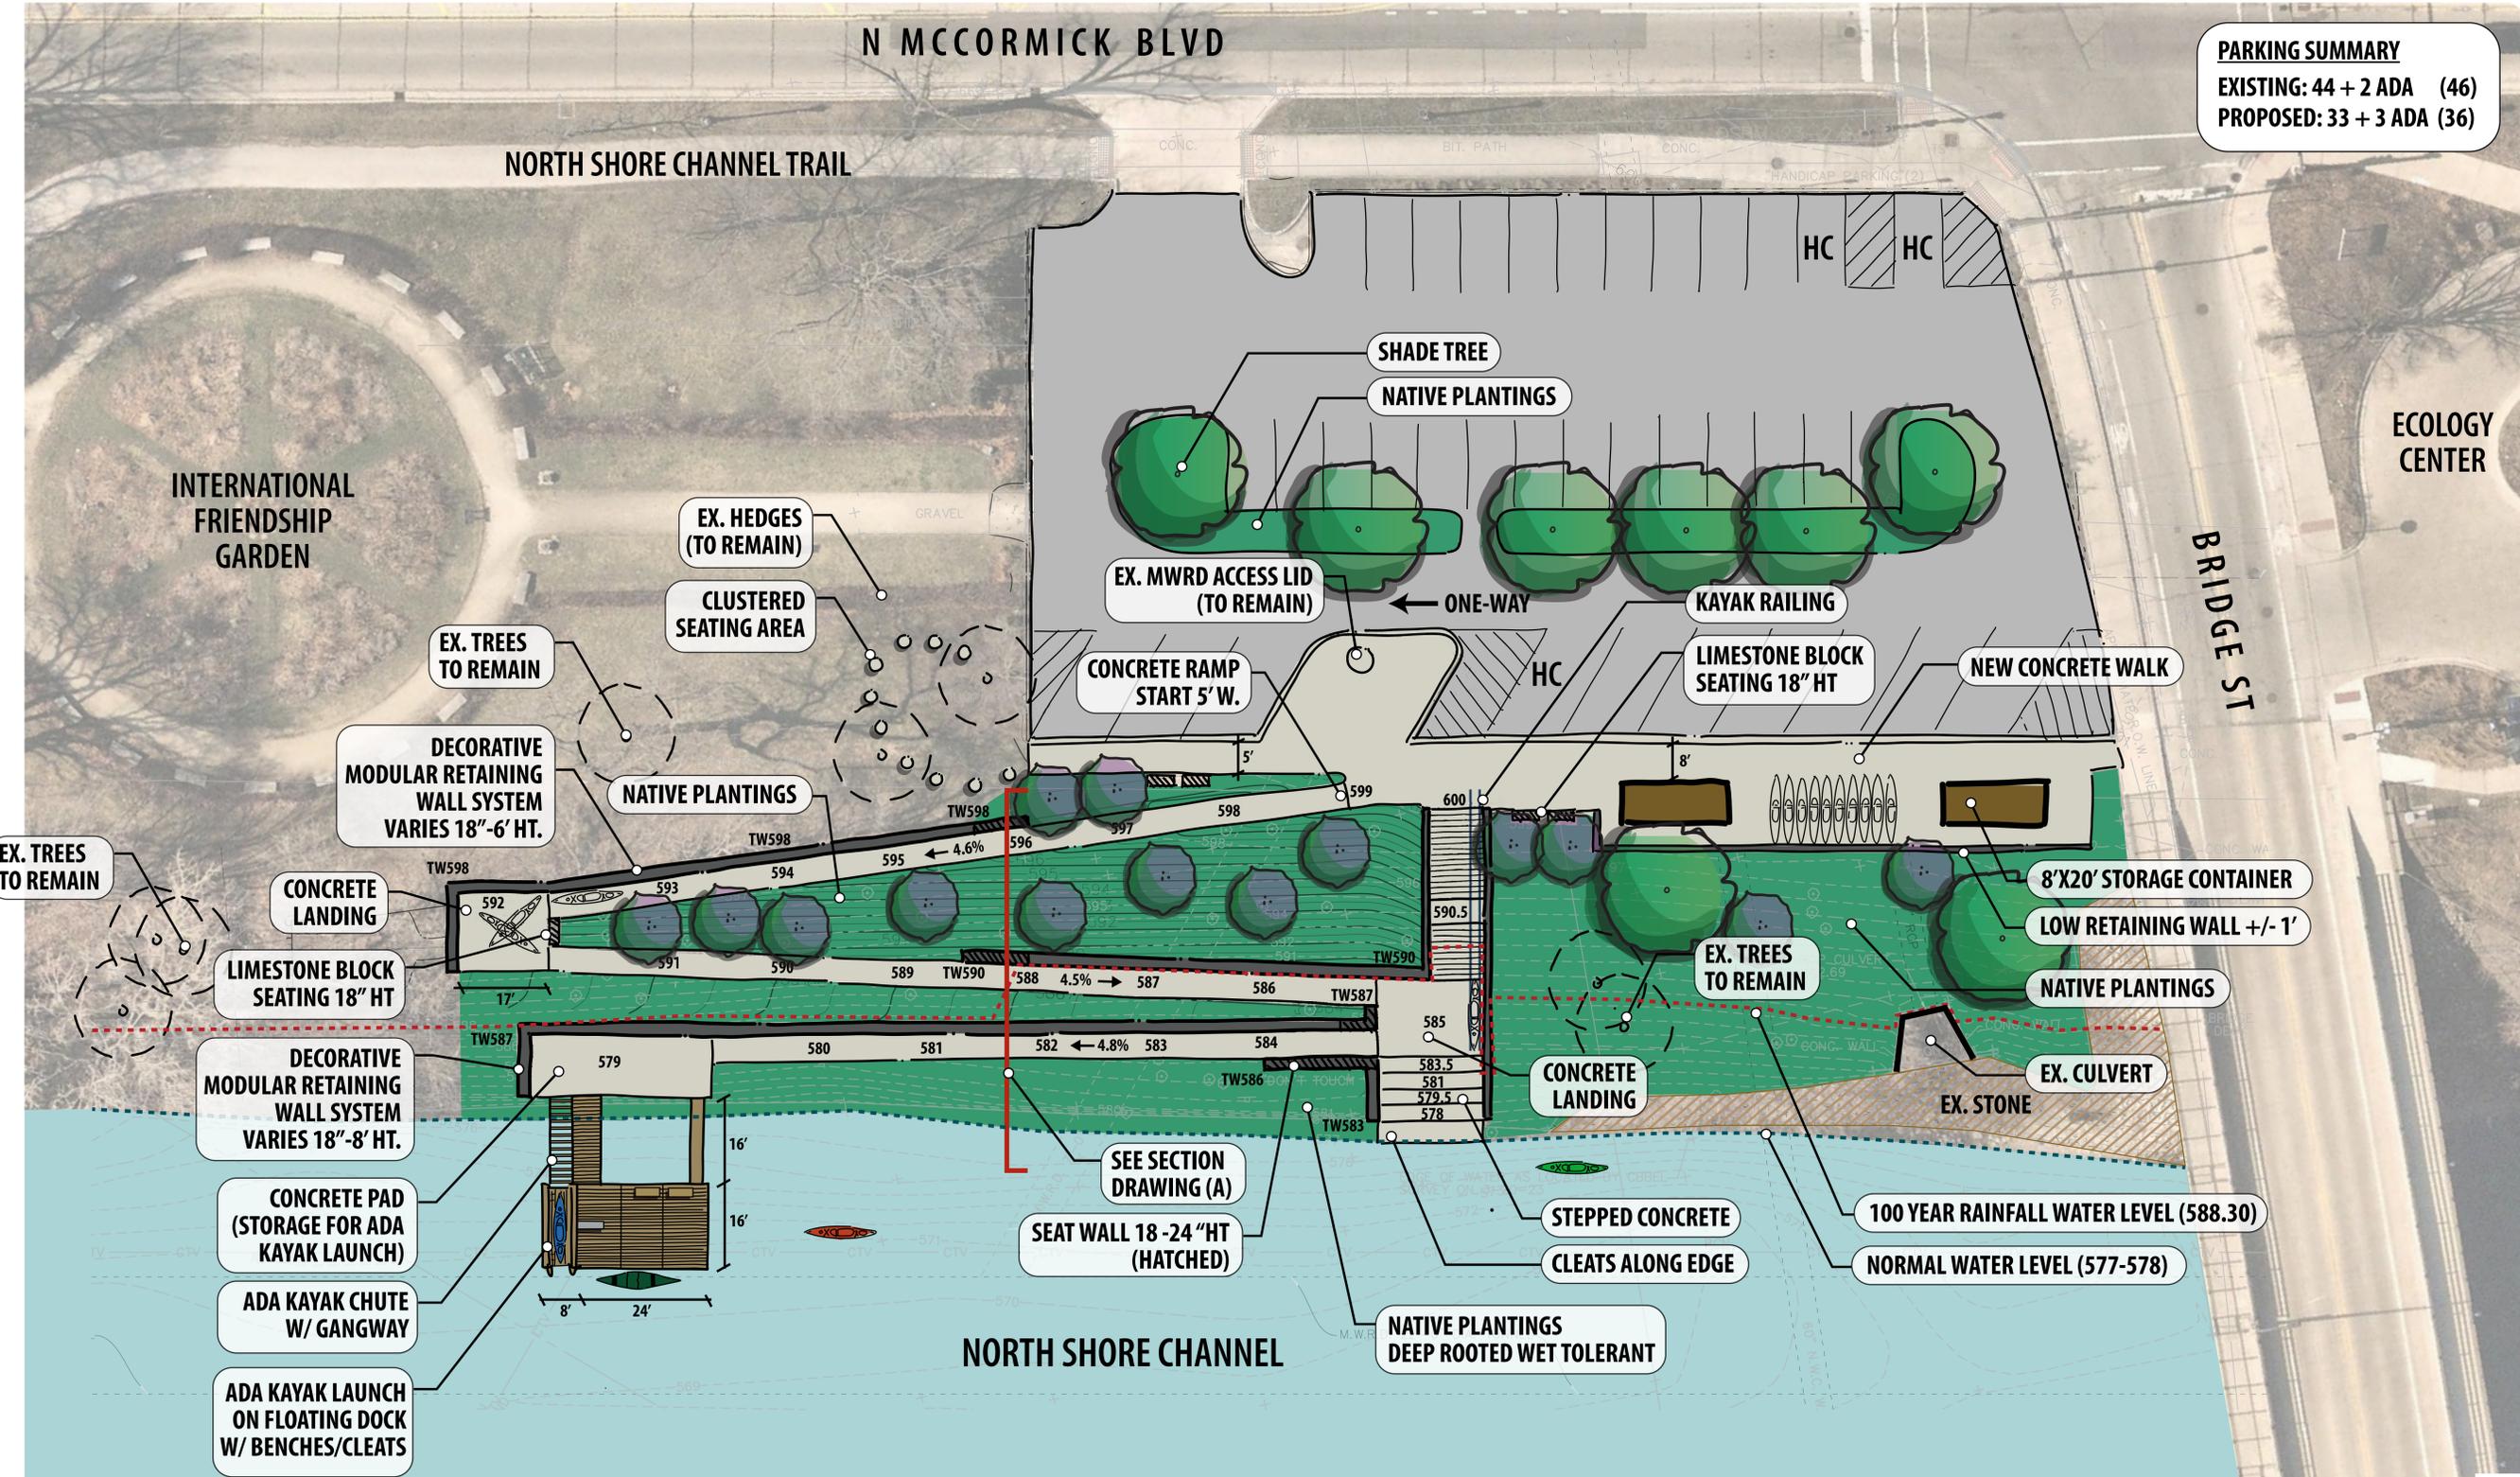

PARKING SUMMARY
 EXISTING: 44 + 2 ADA (46)
 PROPOSED: 33 + 3 ADA (36)



What comments do you have about the concept?
Use the post-its to post your comments below.

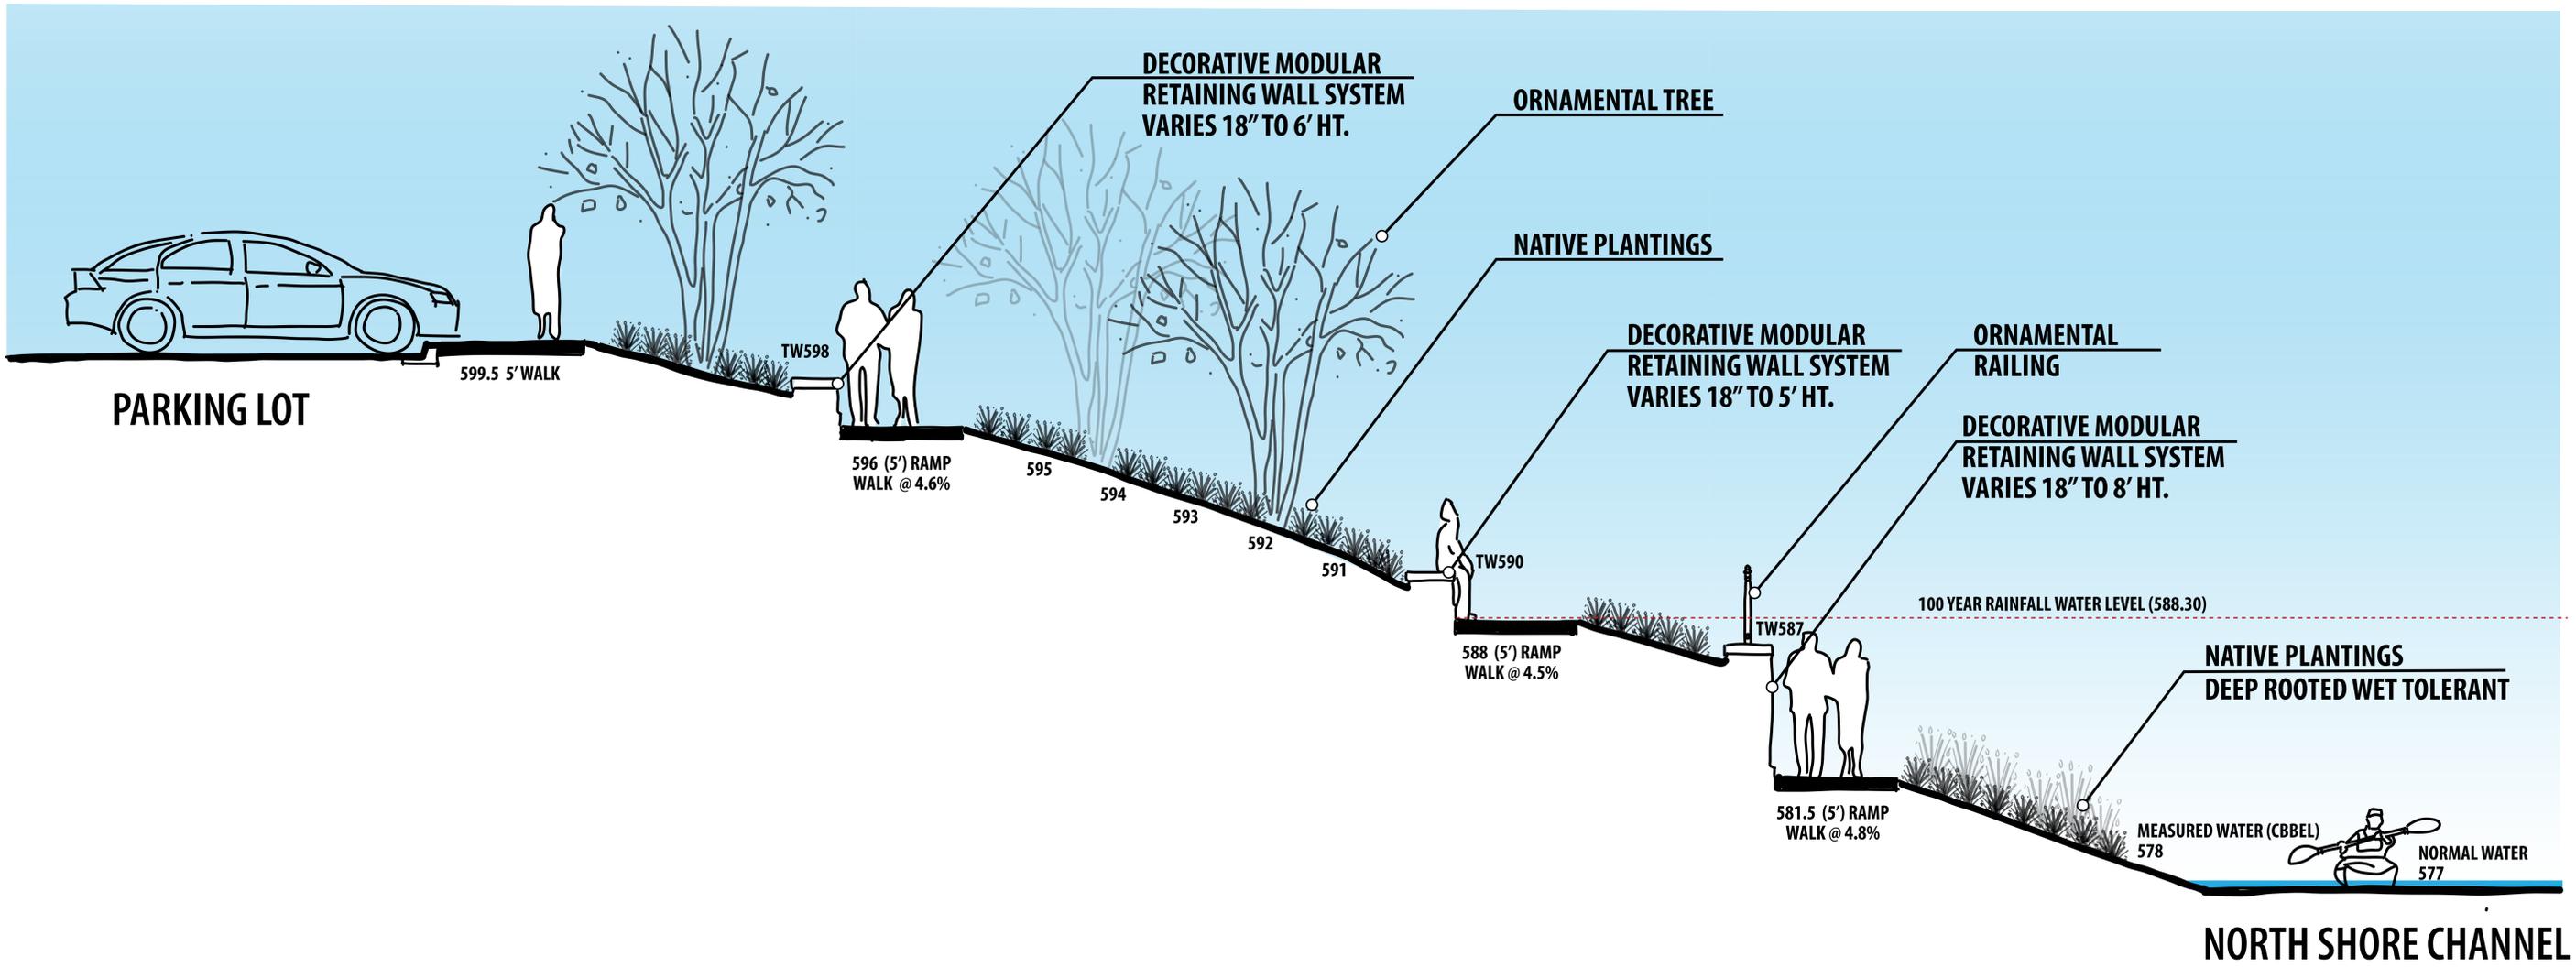

Concept Products + Materials

CANOE / KAYAK LAUNCH PRODUCTS UNDER CONSIDERATION



Boardsafe ADA Canoe / Kayak Launch



Boardsafe Floating Dock / Gangway / Launch / Chute



Railings (left) and keel rollers (right)

SITE FURNISHINGS + PRODUCTS UNDER CONSIDERATION



Limestone Block Benches



Stone Seating Area



Modular Retaining Wall System with Optional Lighting



Wildlife Habitat - Insect House / Bird + Bat House

Anticipated Schedule + Costs

SCHEDULE		
2023	SPRING/SUMMER	PROJECT KICKOFF + LOCAL SITE TOURS <i>(March - April)</i> TOPOGRAPHIC SURVEY + INITIAL GEOTECHNICAL SERVICES <i>(April - June)</i> DESIGN COORDINATION (ADAPTIVE ADVENTURES, BOARDSAFE, MWRD) <i>(Ongoing)</i> CONCEPTUAL DESIGN + COSTS <i>(July - August)</i>
	FALL/WINTER	ADDITIONAL GEOTECHNICAL FIELD WORK <i>(Fall/Winter)</i> REFINED CONCEPT DESIGN + COSTS <i>(Fall)</i> PUBLIC MEETING <i>(Fall)</i> FUNDRAISING <i>(Fall/Winter)</i>
2024	SPRING/SUMMER	CONSTRUCTION DOCUMENT PRODUCTION + PERMITTING
2025+	TBD, PER FUNDING	BIDDING + CONSTRUCTION

**WE ARE
HERE**

COSTS	
PROJECT SETUP, SURVEY, MOBILIZATION	\$50,000
DEMOLITION, REMOVALS, SILT FENCE, SITE PROTECTION	\$33,600
EARTH MOVING, MASS GRADING, EXCAVATION	\$245,500
SITE WORK, CONCRETE, WALLS, SIDEWALKS, NATURAL STONE, EROSION CONTROL	\$1,098,250
ADA CANOE LAUNCH, RAMPS, GANGWAY, ACCESSORIES	\$187,000
FINE GRADING, SOIL BACKFILL, LANDSCAPE, RESTORATION, SITE FURNISHINGS	\$71,400
PARKING LOT RECONSTRUCTION, LIGHTING, LANDSCAPE	\$371,300
<hr/>	
SUBTOTAL:	\$2,057,050
CONTINGENCY (15%):	\$ 308,558
TOTAL:	\$2,365,608



Have other comments? Post them here!

